

**bloc**

Solid Colour Sheet Flooring

# THE WORLD IS RICH WITH COLOUR

it's everywhere

The perception of colour is a personal experience; it is associated with moods and feelings and the belief it can improve mental well-being through the creation of a positive ambience. At home and in the workplace, colour choice can bring together all elements of a creative interior design scheme, providing either a subtle backdrop or the opportunity to create a bold modern statement.

## Solid Colour Sheet Flooring

New **Bloc PUR** from Polyflor gives you that extensive choice to create tonal, complementary or harmonious interior design schemes through the availability of a broad spectrum of 16 enticing colours.

Featuring a fully pigmented homogeneous PVC wear layer of pure colour with a textured emboss, **Bloc PUR** is a high performance, heavy duty sheet floorcovering ideally suited for use within the retail, leisure and commercial sectors.

Colour is a choice. It can be elegant and timeless, contemporary and fresh or high on drama and so the question is...

which is  
**your** favourite

**bloc**

Colour?

**Loft White**

9931

p06

**Rock Salt**

9932

p08

**Studio Grey**

9933

p10

**Urban Chic**

9934

p12

**Cool Breeze**

9936

p14

**Caramel Blush**

9944

p16

**Clay Deep**

9946

p18

**Lilac Essence**

9949

p20

**Nordic Sky**

9937

p22

**Lime Crush**

9940

p24

**Soft Moss**

9942

p26

**Woodland Green**

9941

p28

**Marine Blue**

9939

p30

**Lemon Punch**

9947

p32

**Red Beacon**

9948

p34

**Classic Black**

9935

p36

## Loft White 9931

For neutral schemes, the use of white can create a sense of drama. Here Loft White is paired with Classic Black to create a cool, contemporary finish.

NCS S 0502-G50Y

w/r 9931

LRV 84.4

# bloc

Solid Colour Sheet Flooring

Features  
Classic Black  
9935  
p36





## Rock Salt 9932

The light grey tone of Rock Salt is set against the darker tone of Urban Chic for a classic, corporate finish.

NCS **S 1502-G50Y**

w/r **9932**

LRV **64.0**

**bloc**  
Solid Colour Sheet Flooring



## Studio Grey 9933

The mid grey shade of Studio Grey provides a calm and understated look.

NCS S 3000-N

w/r 9933

LRV 45.2

# bloc

Solid Colour Sheet Flooring





## Urban Chic 9934

The dark grey shade of Urban Chic creates an elegant space when contrasted against white fixtures and fittings.

NCS S 5502-B

w/r 9934

LRV 20.9

**bloc**  
Solid Colour Sheet Flooring

## Cool Breeze 9936

The light blue of Cool Breeze gives a serene feel to a contemporary space.

NCS S 0515-R80B

w/r 9936

LRV 70.6

**bloc**  
Solid Colour Sheet Flooring





Features  
**Clay Deep**  
9946  
p18



## Caramel Blush 9944

The light beige of Caramel Blush works well in combination with Clay Deep, adding warmth and depth to the colour scheme.

NCS S 2010-Y30R

w/r 9944

LRV 53.0

**bloc**  
Solid Colour Sheet Flooring

## Clay Deep 9946

The darker beige of Clay Deep unifies the scheme that features different textured natural and earthy tones.

NCS S 5005-Y20R

w/r 9946

LRV 24.6

**bloc**  
Solid Colour Sheet Flooring







## Lilac Essence 9949

The use of Lilac Essence creates a serene and calming influence within a bold contemporary space.

NCS S 1510-R40B

w/r 9949

LRV 57.2

**bloc**  
Solid Colour Sheet Flooring

## Nordic Sky 9937

The mid blue of Nordic Sky adds a subtle splash of colour to a neutral scheme.

NCS S 3030-R90B

w/r 9937

LRV 27.6

**bloc**  
Solid Colour Sheet Flooring







## Lime Crush 9940

The vibrant green hue of Lime Crush creates a bold and sophisticated space.

NCS S 2060-G80Y

w/r 9940

LRV 38.3

**bloc**  
Solid Colour Sheet Flooring

## Soft Moss 9942

The earthiness of Soft Moss adds warmth, creating a calming and reassuring space.


NCS S 4040-G70Y

w/r 9942

LRV 22.0

# bloc

Solid Colour Sheet Flooring

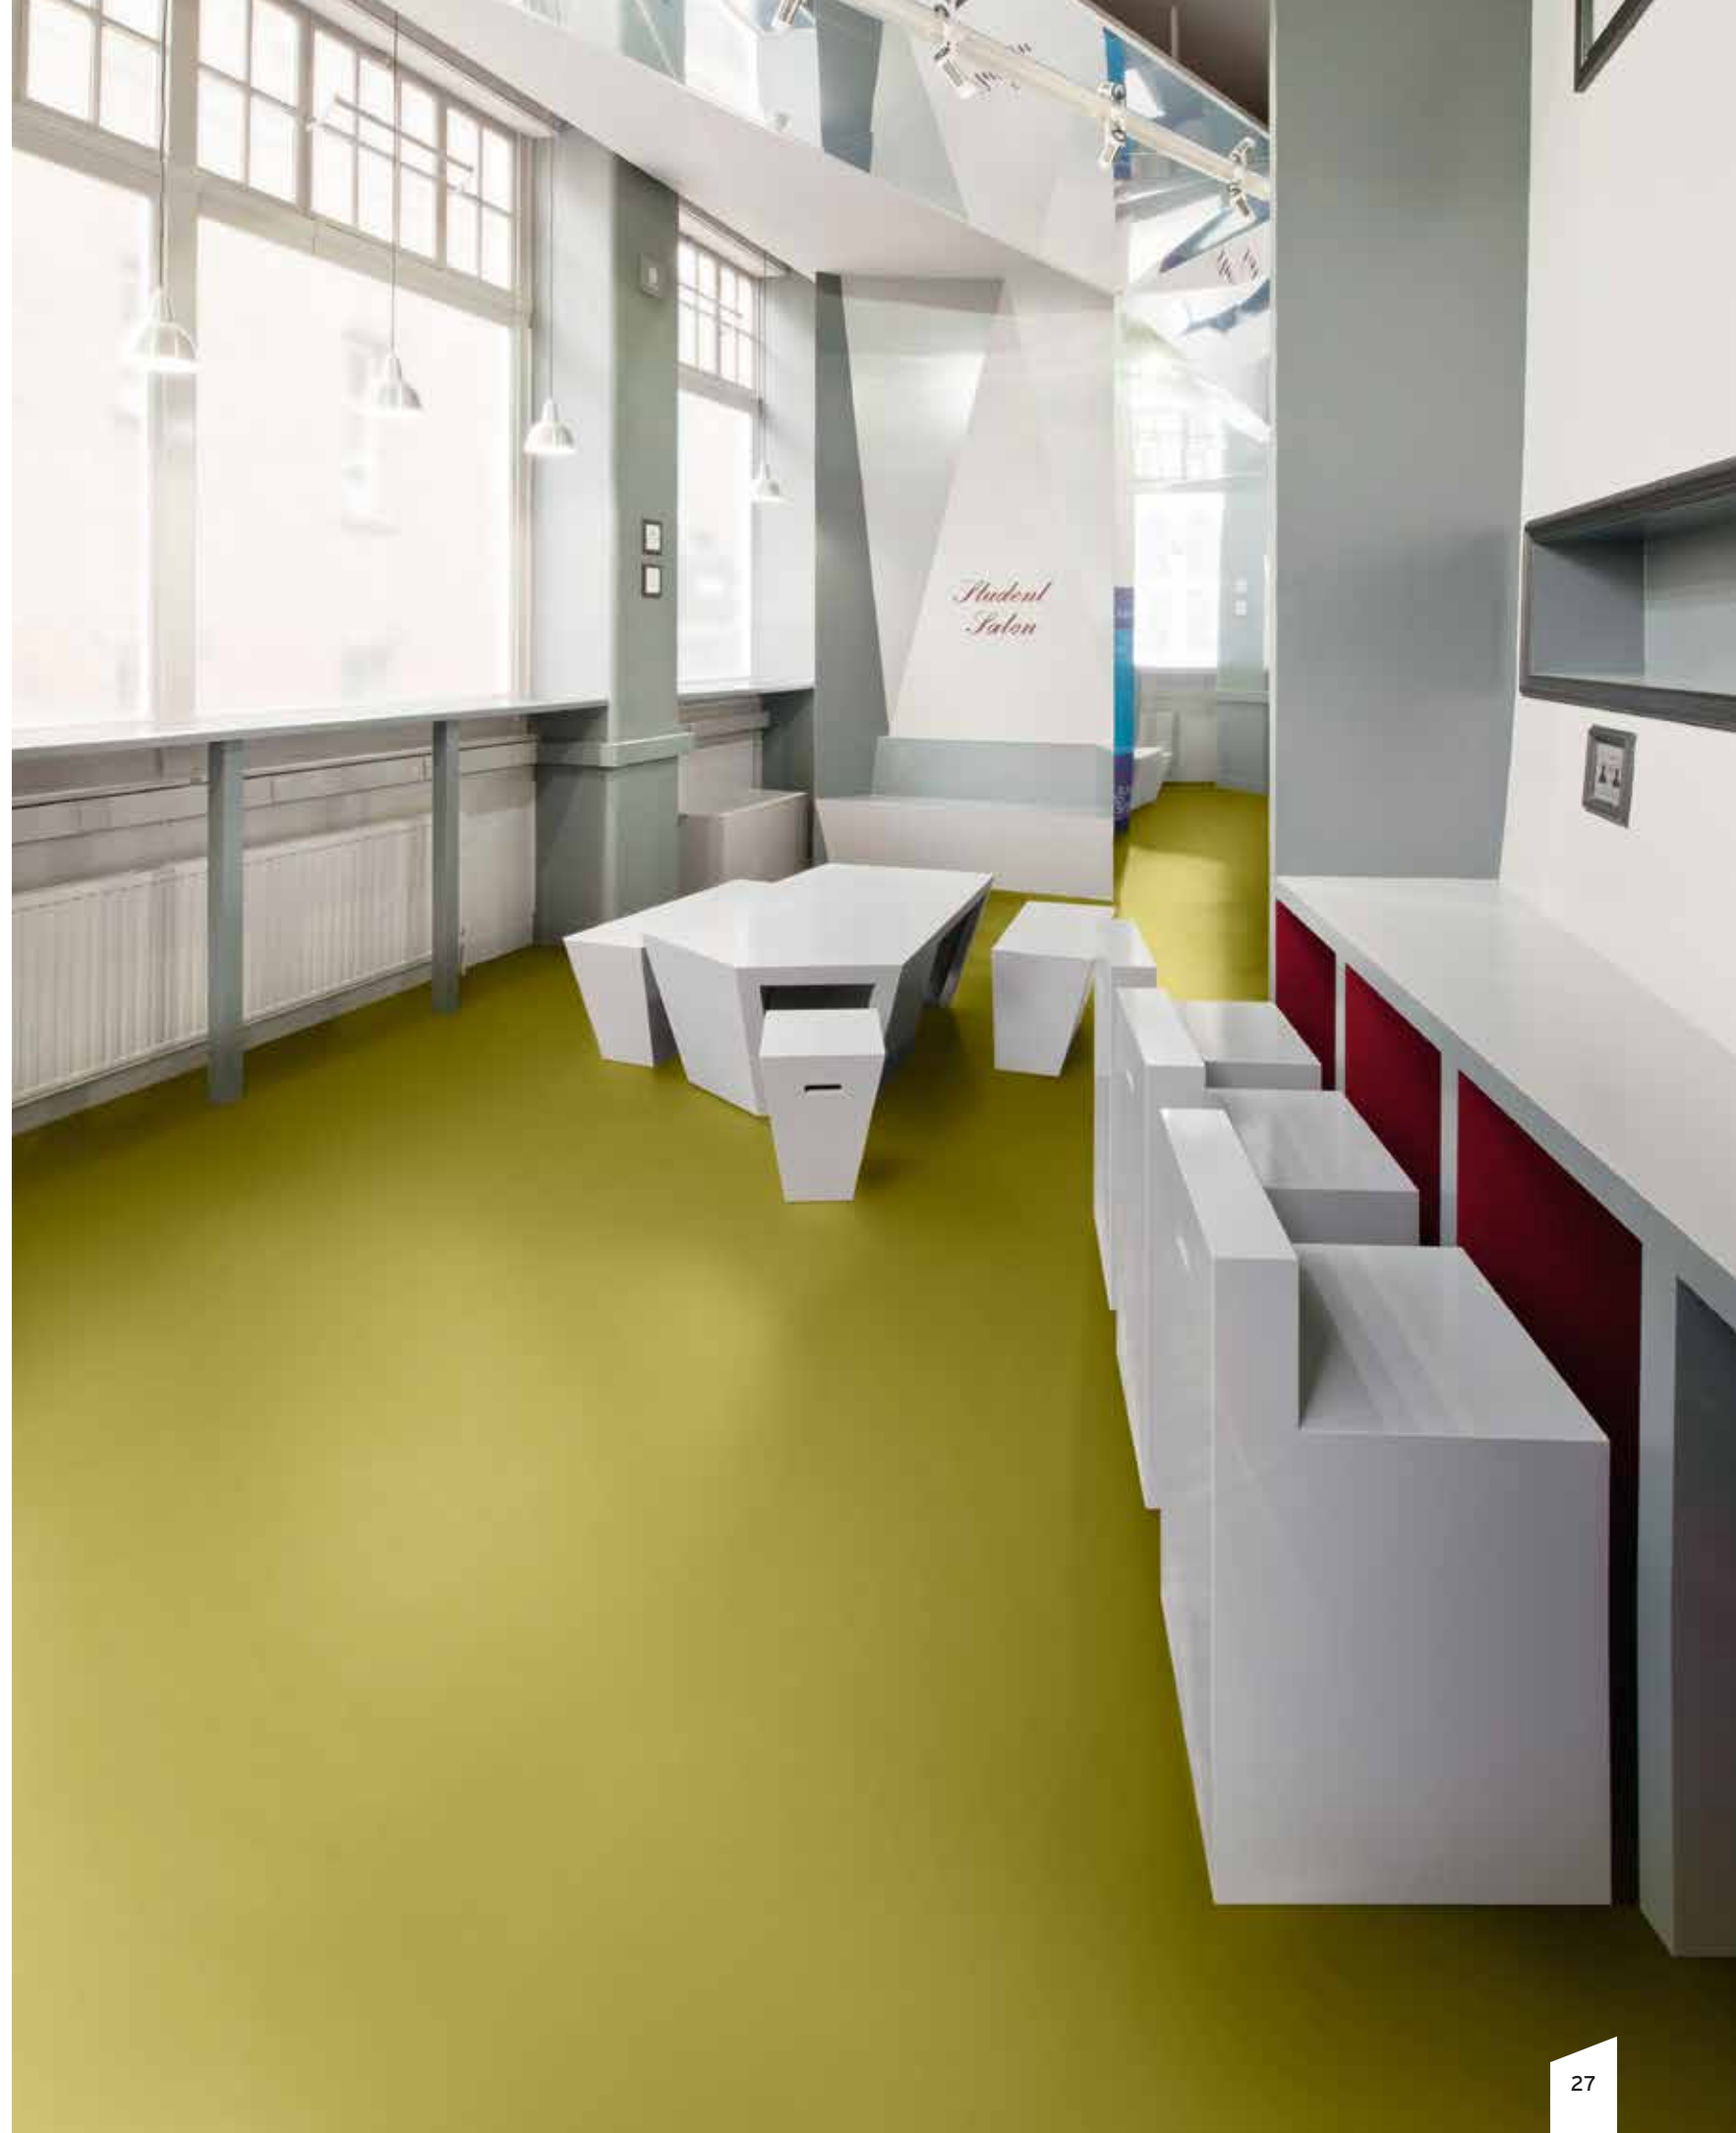

Features  
**Lime Crush**  
9940  
p24



## Woodland Green 9941

The strong colour of Woodland Green is paired with Lime Crush for a balanced and restful scheme.

NCS S 3060-G40Y

w/r 9941

LRV 21.9

**bloc**  
Solid Colour Sheet Flooring



## Marine Blue 9939

The dark blue of Marine Blue when paired with Cool Breeze creates a clean formalised space.

NCS S 5040-R80B

w/r 9939

LRV 9.0

**bloc**  
Solid Colour Sheet Flooring



Features  
**Cool Breeze**  
9936  
p14





## Lemon Punch 9947

The vibrancy of Lemon Punch adds a splash of colour creating a strong and bold interior.

NCS S 1080-Y

w/r 9947

LRV 52.9

**bloc**  
Solid Colour Sheet Flooring

## Red Beacon 9948

The vibrancy of Red Beacon combined with Studio Grey creates a sophisticated stimulating scheme.

NCS S 1080-Y80R

w/r 9948

LRV 18.3

**bloc**  
Solid Colour Sheet Flooring



Features  
Studio Grey  
9933  
p10



Features  
**Urban Chic**  
9934  
p12



## Classic Black 9935

When paired with Urban Chic, the Classic Black creates a strong and sophisticated look.

NCS S 8500-N

w/r 9935

LRV 4.8

**bloc**  
Solid Colour Sheet Flooring

# Technical Specifications

Specifications	Standards	Bloc PUR
Gauge	EN 428/ISO 24346	2.0mm
Wear Layer	EN 429/ISO 24340	0.70mm
Roll Size	EN 426/ISO 24341	2m x 20m = 40m <sup>2</sup>
Total Weight	EN 430/ISO 23997	2660g/m <sup>2</sup>
General Performance	EN 649 ISO 10582	Conforms Conforms
Use Area	EN 685/ISO 10874	23 / 34 / 43
Resistance to Chemicals	EN 423	Excellent chemical resistance
Reaction to Fire	EN 13501-1 ASTM E648	Class Bfl-S1 Class 1
Abrasion Resistance	EN 649 EN ISO 10582	Group T Type I
Slip Resistance*	EN 13893 AS 4586 DIN 51130	Class DS (dry condition) R10 R10
Indentation Residual	ISO 24343-1 ASTMF970 (Modified)	<0.10mm Static load 750psi
Castor Chair (continuous use)	EN 425/ISO 4918	Suitable
Dimensional Stability	EN 434/ISO 23999	<0.40%
Flexibility	EN 435/ISO 24344	(Method A) Pass 20mm
Thermal Conductivity	-	Suitable for underfloor heating (max 27°C)
Electrical behaviour (body voltage)	EN 1815	≤2kV Classified as 'antistatic'
Light Fastness	ISO 105-B02	(Method 3) ≥6
VOC Emissions	Indoor Air Comfort GOLD FloorScore	Eurofins certified product SCS Certified Reg No: SCS-FS-02034

**Environmentally Preferable Flooring** - Polyflor **Bloc PUR** achieves a BRE Global A+ rating (Generic) in the Green Guide to Specification in use areas such as retail, education and healthcare. Generic EN 15804 Environmental Product Declaration (EPD) available on request. Recyclable via the Recofloor scheme. Visit [www.polyflor.com/sustainability](http://www.polyflor.com/sustainability).



**PUR** - Polyflor **Bloc PUR** features a high quality, cross-linked polyurethane reinforcement, UV cured to provide a low-cost, polish free maintenance regime for the lifetime of the flooring. As with any plain material, the soil hiding properties are less than similarly coloured patterned floors. Higher frequency of maintenance may be required to ensure optimum appearance. Careful consideration should also be given when choosing very light colours in highly trafficked areas. The use of a robust and effective dirt barrier system should be considered early in the specification stage.

**Hygiene** - All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.

For information and advice regarding handling and installation, adhesives, tailored maintenance, applications, chemical resistance and product warranty, consult Polyflor Customer Technical Services on +44 (0)161 767 1912, or email [tech@polyflor.com](mailto:tech@polyflor.com).

\*For safety flooring with sustainable wet slip resistance, refer to Polysafe ranges. The data presented is correct at the time of printing.


For latest information, please visit our website [polyflor.com](http://polyflor.com). Decoration and shade may vary slightly from the samples shown.

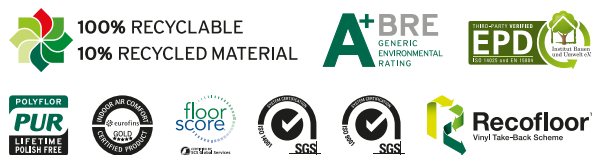

## Product Construction

Polyflor **Bloc PUR** is a 2.0mm flexible PVC sheet flooring with a 0.7mm fully pigmented homogeneous PVC wear layer.

Featuring a collection of evenly dispersed single solid colours with a textured finish, **Bloc PUR** is available in sheet format (2m x 20m = 40m<sup>2</sup>).

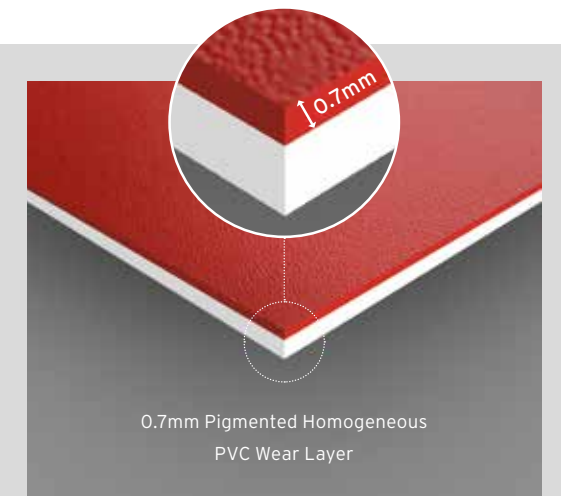

## Installation

### Alignment

The installation procedure for **Bloc PUR** is comparable to that recommended for Homogeneous and Safety vinyl sheet, however as a plain floorcovering there are specific differences in relation to alignment of adjacent sheets and welding options. To maximise the final appearance of the installation and to ensure the uniformity of the plain decoration **Bloc PUR** must be reverse laid.

### Welding the Sheet

Specific requirements for the welded finish may be outlined in the job specification and there are two methods of welding recommended for **Bloc PUR**.

Cold chemical welding that uses a solvent to fuse the two sides of a seam together is recommended whenever a high degree of aesthetic finish is required. If preferred, **Bloc PUR** is suitable for hot or heat welding that uses a weld rod to fuse pre-grooved seams. Both methods provide a permanent join which prevents the seam edges lifting and the ingress of dirt or moisture.

### Subfloors

Extra attention is needed when preparing the subfloor to ensure a smooth and even finish is achieved in order to avoid any irregularities becoming visible through the plain decoration.

### Adhesives

For best results the use of a pressure sensitive adhesive is recommended for **Bloc PUR**. See Approved Adhesive List on [www.polyflor.com/technical](http://www.polyflor.com/technical)

## Maintenance

**Bloc PUR** incorporates a polyurethane reinforcement which protects the floorcovering and combined with the superior closed surface finish, this enhanced protection allows the use of a polish-free maintenance regime.

As with any plain material, the soil hiding properties are less than similarly coloured patterned floors. A higher frequency of maintenance and spot cleaning may be required to ensure the plain floorcovering retains the optimum appearance. Also at the outset, careful consideration should be given when choosing very light colours in highly trafficked areas. The use of a robust and effective dirt barrier system should be considered early in the specification stage.

For further information and advice visit [www.polyflor.com/bloc](http://www.polyflor.com/bloc)

*All images are for illustrative purposes only and do not feature welded seams.*



## POLYFLOR™ INTERNATIONAL

### Australia

Polyflor Australia  
Tel: +61 3 9215 4400  
Tel: 1800 777 425  
E-mail: sales@polyflor.com.au

### Canada

Polyflor Canada Inc.  
Tel: +1 905 364 3000  
E-mail: sales@polyflor.ca

### China

Polyflor Hong Kong  
Tel: +(852) 2865 0101  
E-mail: info@polyflor.com.hk

### France

James Halstead France SAS  
Tel: +33 (0) 8 20 20 32 11  
E-mail: info@jhfrance.fr

### Germany

objectflor Art und Design Belags GmbH  
Tel: +49 (0) 2236 966 330  
E-mail: info@objectflor.de

### India

Polyflor India Pvt Ltd  
Tel: +91 22 4023 2485  
E-mail: info@polyflor.co.in

### Ireland

Polyflor Ireland  
Tel: +353 (1) 864 9304  
E-mail: salesireland@polyflor.com

### New Zealand

Polyflor New Zealand  
Tel: +64 9 269 1111  
Tel: 0800 765 935  
E-mail: sales@polyflor.co.nz

### Norway

Polyflor Nordic  
Tel: +47 23 00 84 00  
E-mail: firmapost@polyflor.no

### Poland

Polflor Sp. Z o.o.  
Tel: +48 (0) 61 820 3155  
E-mail: polyflor@polflor.com.pl

### Russia

Polyflor Contract Ltd  
Tel: +7 (812) 332 42 02  
E-mail: info@polyflor.ru

### South Africa

Poly Sales Africa (Pty.) Ltd  
Tel: +27 11 609 3500  
E-mail: info@polyflor.co.za

### Sweden

FalckDesign AB  
Tel: +46 (0) 300 15820  
E-mail: info@falckdesign.com

[www.polyflor.com](http://www.polyflor.com)



## POLYFLOR™ HEAD OFFICE

POLYFLOR LTD, PO BOX 3 RADCLIFFE NEW ROAD WHITEFIELD MANCHESTER M45 7NR UK

UK SALES DIRECT: +44 (0)161 767 1122

UK SAMPLE REQUESTS: +44 (0)161 767 2551

EXPORT SALES DIRECT: +44 (0)161 767 1913

UK FAX: +44 (0)161 767 1128

EXPORT FAX: +44 (0)161 767 1166

TECHNICAL SUPPORT: +44 (0)161 767 1912

RECEPTION: +44 (0)161 767 1111

E-MAIL: INFO@POLYFLOR.COM

WEBSITE: WWW.POLYFLOR.COM